

# GHAIK 6.5" Open Frame Monitor

## GHK-06OP-NA000

### FEATURES


- SVGA (640 x 480) (800 cd/m2)
- VGA & DVI Signal Input
- OSD Control on the Back Side
- DC 12V Power Input
- Integrated Industry-Standard Design
- Support Embedded Mounting



## PRODUCT SPECIFICATIONS

LCD	
Panel Type	AU LCD Panel (Optional)
Resolution (pixel)	640*480
Display Area (mm)	132.48(H)x99.36(V)
Brightness (nit)	800nit
Contrast Ratio	600:1
Colors	262K/16.2M colors
View Angle (U/D/L/R)	80/80/70/70
Backlight Lifetime	50000hrs
OSD Control	Power/Menu/SourceDown/+/-
Touch Screen	
Type	--
Resolution(pixel)	--
Transmittance	>90%
Interface	
Signal Input	VGA+DVI ( 15 Pin D-sub/DVI-D Connector ) AV Input / Video Input /Audio Input (Optional)
Touch Connectors	USB/RS232
Power	
Power Input	DC-in 12V=4A (50~61HZ)-DC Jack (2.0mm)
Power Consumption	≤48W
Mechanical	
Material	High Strength Cold Rolling Steel Chassis
Mounting	Support Embedded Mounting
Dimensions	199.5(H) x 170(V) x 35.5(D)
Environment	
Operating Temp	-30~80C°
Storage Temp	-30~80C°
Relative Humidity	10~90% @40C° Non-condensing without touch screen
Vibration	1G peak,5~500Hz(Random)
Shock	15G peak acceleration (11msec.duration)
Rating	Facilitate installation of the demolition, solid portfolio
Ordering Information	
GHK-06OP-NA000	6.5"Open Frame Monitor with VGA/DVI input and power adapter (640*480 / 800nit)
GHK-06OP-TA000	6.5"Open Frame Touch Monitor with 4 wire resistive touch screen,VGA/DVI input (640*480 / 800nit)

## DIMENSIONS

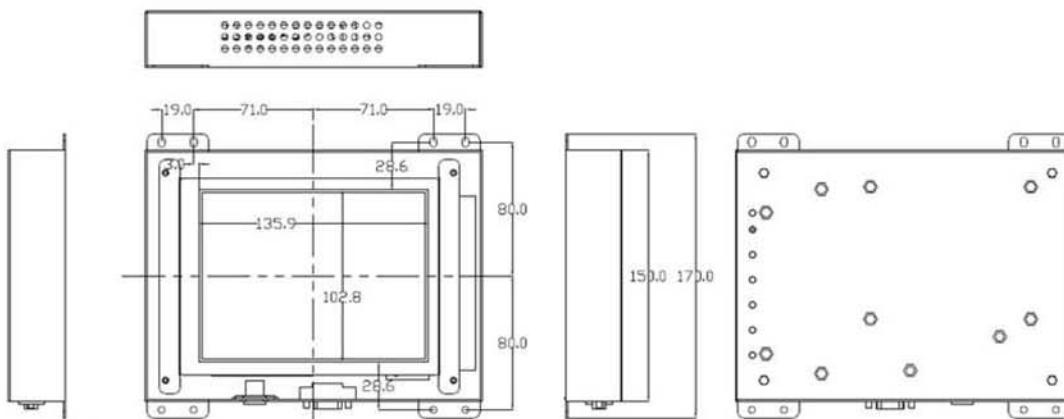

I / O PORT

